
CAMDEN ELECTRONICS LTD

INTERCONNECTION

PCB Mounting Crimp Connectors 2.5mm Pitch


- *Ideal for installed pcb's in boiler controls, HVAC etc.*
- *Polarised to avoid mis-mating*
- *Vertical headers*
- *2 to 20 poles available*
- *CE approved*
- *Staggered pin header available (CTM601)*
- *Two sizes of crimp contact*

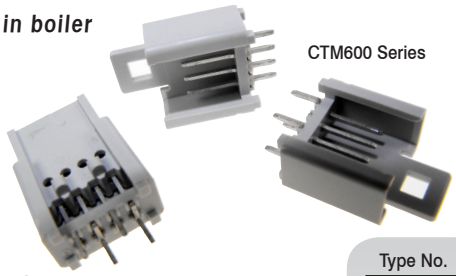

CTM600 Series

Rating	125V/6A
Temperature	110°C
Contact	Tinned, nickel plated brass
Moulding	Grey PA - UL 94 V0

CTM601 Series

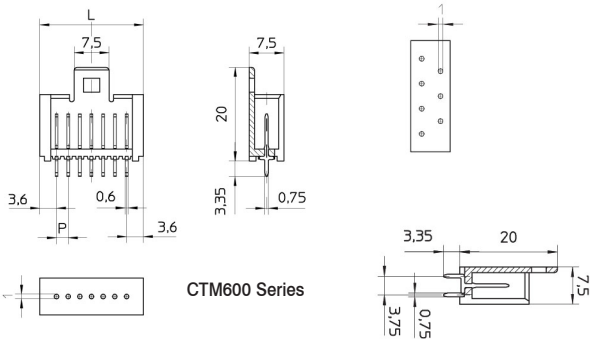


CTM600 Series

Type No.	Poles	Length
CTM600/2	2 way	12.2
CTM600/3	3 way	14.7
CTM600/4	4 way	17.2
CTM600/5	5 way	19.7
CTM600/6	6 way	22.2
CTM600/7	7 way	24.7
CTM600/8	8 way	27.2
CTM600/9	9 way	29.7
CTM600/10	10 way	32.2
CTM600/11	11 way	34.4
CTM600/12	12 way	37.2
CTM600/13	13 way	39.7
CTM600/14	14 way	42.2
CTM600/15	15 way	44.7
CTM600/16	16 way	47.2
CTM600/17	17 way	49.7
CTM600/18	18 way	52.2
CTM600/19	19 way	54.7
CTM600/20	20 way	57.2

Type No.	Poles	Length
CTM601/2	2 way	12.2
CTM601/3	3 way	14.7
CTM601/4	4 way	17.2
CTM601/5	5 way	19.7
CTM601/6	6 way	22.2
CTM601/7	7 way	24.7
CTM601/8	8 way	27.2
CTM601/9	9 way	29.7
CTM601/10	10 way	32.2
CTM601/11	11 way	34.4
CTM601/12	12 way	37.2
CTM601/13	13 way	39.7
CTM601/14	14 way	42.2
CTM601/15	15 way	44.7
CTM601/16	16 way	47.2
CTM601/17	17 way	49.7
CTM601/18	18 way	52.2
CTM601/19	19 way	54.7
CTM601/20	20 way	57.2

CTC600 Series

CTC750 Series

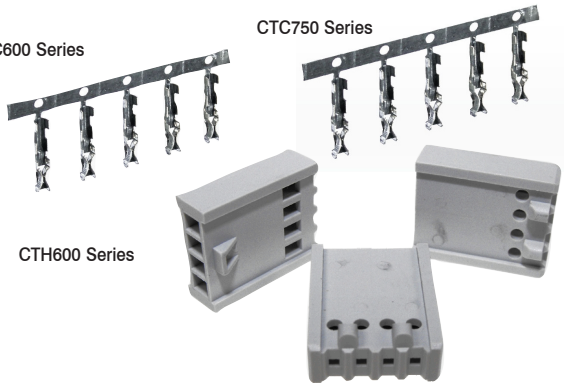


CTH600 Series

CTC600 Rating	6A
CTC750 Rating	7.5A
Temperature	110°C
Contact	Tinned brass
Moulding	Grey PA UL94-V0
Wire: CTC600	0.2 - 0.35mm² 24 - 22AWG
Wire: CTC750	0.2 - 0.5mm² 24 - 20AWG
Strip Length	4mm

Type No.	Poles	Length
CTH600/2	2 way	7.5
CTH600/3	3 way	10
CTH600/4	4 way	12.5
CTH600/5	5 way	15
CTH600/6	6 way	17.5
CTH600/7	7 way	20
CTH600/8	8 way	22.5
CTH600/9	9 way	22.5
CTH600/10	10 way	25
CTH600/11	11 way	27.5
CTH600/12	12 way	30
CTH600/13	13 way	32.5
CTH600/14	14 way	35
CTH600/15	15 way	37.5
CTH600/16	16 way	40
CTH600/17	17 way	42.5
CTH600/18	18 way	45
CTH600/19	19 way	47.5
CTH600/20	20 way	50

CTC750 series

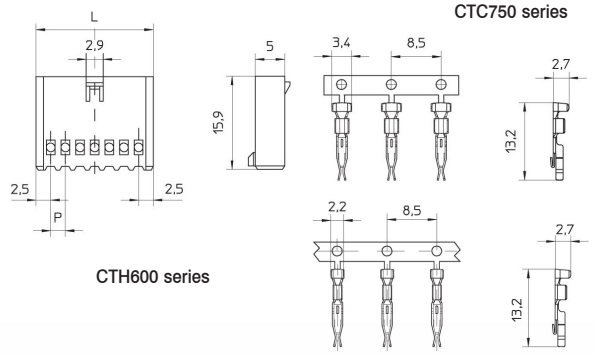

CTH600 series

CTC600 series

CAMDEN ELECTRONICS LTD

Tel: +44 (0)1727 864437 Fax: +44 (0)1727 855400

E-mail: camdeninfo@camdenelec.com Website: www.camdenelec.com

Because we operate a constant improvement policy, our products are subject to change without notice.

FM28614
BS EN ISO 9001: 2000